

High Speed Homogenizer

Used for homogenizing, emulsifying or suspending. There is a broad spectrum of dispersing tools to choose from.


Advantages of homogenizer

- Continuously adjustable speeds for better results
- Light-weighted and small-dimensioned for better handling
- Triple safety of the drive (overload protection. Smooth start – against jerky work, safety switch)
- High quality dispersing tools as standard for better resistance to corrosion (SS 316 L steel)
- Quick-change system of the dispersing tools for a short changing time between preparations
- Viscosities up to 10,000 cps
- One shaft size
- High quality lab dispersing unit, at a competitive price!!

Specifications

D-500	
Speed with Zero-Load (rpm)	10000 ~ 30000
Process Range H ₂ O(mL)	10 ~ 40000
supply voltage (V)	220V 50/60Hz
Input / Output Power (W)	500/320
Weight (kg)	1.3
Contact Material	316L Stainless Steel / PTFE
Dimensions (W x L x H in mm)	70X70X255
Order No.	1710500

Shaft Selection Guide for High Speed Homogenizer

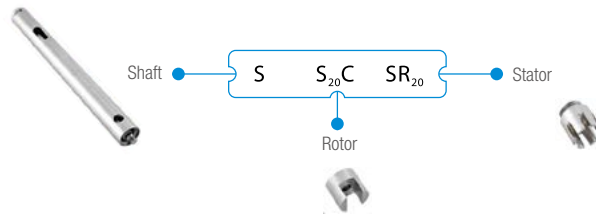

Shaft 5
Includes: Shaft, PTFE bearing, 5 mm stator, 4 mm rotor



SS20CSR20
Includes: Shaft, PTFE bearing, 20 mm stator, standard rotor SR20



SS20FER20
Includes: Shaft, PTFE bearing, 20 mm stator, emulsification rotor ER20



SS30CSR30
Includes: Shaft, PTFE bearing, 30 mm stator, standard rotor SR30



SS30FER30
Includes: Shaft, PTFE bearing, 30 mm stator, emulsification rotor ER30



SS40CMR30
Includes: Shaft, PTFE bearing, 40 mm stator, mixing rotor MR30

Shaft / Order Table

Rotor Name	Function Description	Process Volume	Linear Velocity	Rotor Diameter	Stator Diameter	Min. / Max.	Ultimate Fineness		Disinfection Method	Applications*
Order No.		mL	m/s	mm	mm	Immersion Depth	suspension	emulsion		
SS20CSR20	Solid-Liquid Mixing Material	10-5000	23.5	15	20	40/170	10-50	1-10		P,CI,PC,SD
SS20CCR20	Fiber Material	10-5000	23.5	15	20	40/170	10-50	1-10		SP,M,F,PT,TI
SS20CMR20	Solid-Liquid Mixing Material	10-5000	23.5	15	20	40/170	10-50	1-10		CI,PI
SS20FER20	Latices	10-5000	23.5	15	20	40/170	10-50	1-10		SP,PI,PT,P
SS20FCR20	Fiber Material	10-5000	23.5	15	20	40/170	10-50	1-10		SP,BT,M,F,PT,TI
SS20FMR20	Solid-Liquid Mixing Material	10-5000	23.5	15	20	40/170	10-50	1-10		CI,C,P,F,PT,PC
SS30CMR20	Stirring Paddle Function	250-20000	36.1	15	30	40/170	High-speed mixer			CI,F,SP
SS30CSR30	Solid-Liquid Mixing Material	100-8000	36.1	23	30	40/170	5-25	1-5		SP,M,F,PT,P
SS30CCR30	Fiber Material	100-8000	36.1	23	30	40/170	5-25	1-5	all methods	SP,M,F,PT,P
SS30CMR30	Solid-Liquid Mixing	100-8000	36.1	23	30	40/170	5-25	1-5		CI,PI
SS30FSR30	Solid-Liquid Mixing Material	100-8000	36.1	23	30	40/170	5-25	1-5		SP,PI,PT,P
SS30FER30	Latices	100-8000	36.1	23	30	40/170	5-25	1-5		SP,PI,PT,P
SS30FMR30	Solid-Liquid Mixing Material	100-8000	36.1	23	30	40/170	5-25	1-5		CI,C,P,F,DT,TI
SS30CMR30	Stirring Paddle	1000-40000	36.1	23	40	40/170	High-speed mixer			CI,F,SP
Shaft 5	Solid-Liquid Mixing Material	0.2-50	6.3	4	5	40/60	10-50	1-10		BT,M
Shaft 10	Solid-Liquid Mixing Material	1-250	6.3	9	10	10/60	10-50	1-10		BT,M
Shaft 14	Solid-Liquid Mixing Material	100-1000ml	6.3	13	14	10/60	10-50	1-10		BT,M

Note: BT = Biology; F = Food Industry; P = Pharmaceutical Industry; C = Cosmetic Industry; M = Medical Analysis; PC = Petrochemical Industry; PT = Paper Production Industry; SP = Wastewater Analysis; CI = Ceramic Industry; CH = Chemical Industry; PI = Paint Industry; TI = Tobacco Industry